

TECHNICAL DATA SHEET

UNIBLOCK UBT+ 1000 with POWERBRIDGE 21MJ

Highlights UNIBLOCK UBT+

- Single machines sized 500 kW up to 2700 kW and paralleling up to 40MW
- Higher reliability than other technologies
- Highest efficiency, up to 97% on line (with energy store connected)
- Economic Power Management
Number of active units in a parallel system is automatically adapted to the load level
- Total Design Flexibility
- Free choice of standby Gensets
- Medium Voltage available
- Water cooling available using building chilled water
- Battery- or flywheel backed versions
- More than 3 times longer bridging time from Piller kinetic energy storage than with any other commercially available flywheel system
- Redundant on-board power supplies
- Leading and lagging output power factor without derating
- 100% load step capability even in Genset operation
- Inherent fault clearing ability for short circuit faults without bypass
- Virtual unity input power factor
- 99% input/output harmonic isolation



Nothing protects quite like Piller

TECHNICAL DATA SHEET

UNIBLOCK UBT+ 1000 with POWERBRIDGE 21MJ



Output

Rated power	kVA	1100
Rated active power	kW	1000
Rated voltage	V	400 / 231 (±5% adjustable)
Rated frequency	Hz	50
Rated current	A	1588
Power factor		0,9
Voltage stability		
■ static with symmetrical load	%	±1
■ dynamic with 50% load change (PF 1,0)	%	±1
■ dynamic with 50% load change (PF 0,9)	%	±3
■ dynamic with 50% load change (PF 0,8)	%	±5
Settling time (±2%)	ms	200
Frequency stability		
■ static self controlled	%	0,1
■ on mains ¹	%	1
■ dynamic with 100% load change	%	1
Voltage distortion (EN 62040-1)		
■ symmetrical linear load (Ph-Ph/Ph-N)	%	1,5 / 2,5
Overload capability (normal operation)		
■ 1 hour	%	10
■ 2 minutes	%	50
Maximum crest factor		limitless for harmonic loads
Phase angle (symmetrical load)	°	120 ±1
Maximum permissible unbalance ²	%	100
Short-circuit current	kA	20,1 (ca. 13x rated current) for 10ms

¹ According to the adjusted tolerance for the mains frequency

² Load unbalance capacity = different loading of the individual phases in a three-phase AC system.

TECHNICAL DATA SHEET

UNIBLOCK UBT+ 1000 with POWERBRIDGE 21MJ



Input

Rated voltage	V	400 / 231
Rated frequency	Hz	50
Rated current	A	1555
Power factor		0,97
Permissible voltage deviation		
■ continuous	%	±10
■ short-time	%	-20
■ dynamic	%	-50
Frequency tolerance	%	±1 (adjustable ±5%)
Harmonic attenuation (input to output and output to input)	%	> 99
Current distortion	%	< 3
Synchronisation time after mains return	s	< 3
Starting current	A	800
Starting time	s	30
Maximum current ¹	A	1831
Max. reverse current on mains short-circuit	A	3119

POWERBRIDGE

Backup time	s	19
re-charge time	s	227 (adjustable ²)

¹ Individual input protection is required.

² Value affects the maximum input current

TECHNICAL DATA SHEET

UNIBLOCK UBT+ 1000 with POWERBRIDGE 21MJ



General data

Efficiency (at 100% load, cos ϕ 1,0)	%	95,7
Losses (at 100% load, cos ϕ 1,0)	kW	45
Max. heat dissipation	kW	78
Interfaces (Standard)		
■ outputs (dry contacts)		6
Wall-distance backside		not required
Colour		RAL 5012
Noise level (at distance of 1m)	dB(A)	
with silencer	dB(A)	77
Ambient temperature	°C / °F	0-40 / 32-104
■ Daily mean average	°C / °F	≤ 35 / ≤ 95
Ambient humidity (without condensation)	%	0-95
Installation altitude (above mean sea level)		
■ up to 1000m		without any derating
■ 1000m - 2000m		5% derating
Protection type (DIN/VDE 0470 part 11/92 IEC 529)		IP 20
Radio interference level (IEC 62040-2)		class C2 (class A acc. to EN 50091-2)
Cable connection		from top and bottom possible
Accessibility		front
Parallel configuration		up to 16 modules
Dimensions / Weight		
■ Width	mm (in.)	5300 (208,661)
■ Depth	mm (in.)	1320 (51,968)
■ Height	mm (in.)	2700 (106,299)
■ Weight	kg (lb.)	18300 (40344,18)

Options

- 4pole for neutral switching
- customer specific colours
- Castell-Key / Kirk-Key
- water cooling
- APOCONNECT (remote diagnostics)
- UNMS (Visualisation)
- DATAWATCH (shut-down)
- Profibus-DP
- Protocol-Gateway (3 maximum)
- I/O-card (3 maximum)
- SNMP-adaptor with Ethernet Interface
- OPC-Server

www.piller.com


PILLER
Power Systems

Issue:
14.Jan.15

Modifications reserved

TECHNICAL DATA SHEET


UNIBLOCK UBT+ 1000 with POWERBRIDGE 21MJ



Option Water Cooling

Max. heat dissipation	kW	78
Volume flow (per cooler)		
■ air *	m ³ /h	4500
■ water	m ³ /h	6
Pressure loss (per cooler)		
■ air *	Pa	50
■ water	kPa	25
Cooling water inlet temperature	°C / °F	5-20 / 41-68
Nominal size of connection	in.	1 ½" DN40
Condenser drain (inner diameter)	mm	13
Weight (additional)	kg (lb.)	1200 (2645,52)

Dimensions

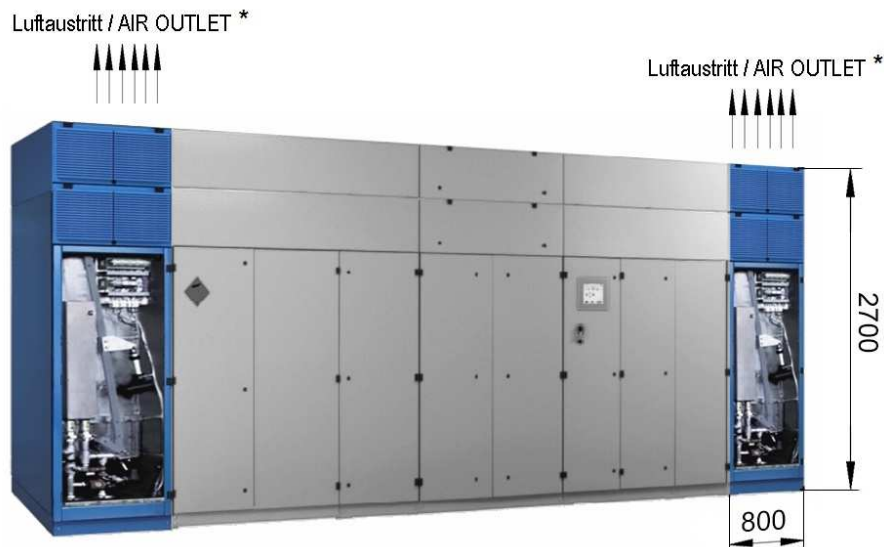

* during emergency operation due to loss of water

www.piller.com

Issue:
14.Jan.15

Modifications reserved


PILLER
Power Systems